

Applications

1. CNC machines status indicator
2. Textile machines
3. Production plants
4. Automatic machines
5. Audio Visual Indicators

Features

- Ideal For audio - Visual alarm.
- Led based technology
- Available in 5 colors
- Available in all AC & DC voltage
- Easy 22.5mm cutout mounting
- Bright LED glow
- 1 Year warrantee
- Easy Installation
- No need to assemble or stack at customer's end. It is preassembled.
- Uniform smooth glow

Function:-

When supply is given any tier terminals respective indication glows

Other related models

1. One, two, three tier steady, flasher & buzzer combinations of all colours.

Head Office.

Plot. No. A/34, Additional Ambarnath MIDC, Anand Nagar, Ambarnath (E), Dist. Thane
Maharashtra, India — 421 506.

Sales Inquiry from outside INDIA : +919321252022, +91251-2621706, 2621518, 2621519 Email:- mimic.ledlamps@gmail.com

Sales Inquiry from INDIA : 09321252022, 0251-2621706, 2621518, 2621519


Website:-www.mimicproducts.com

Quick Contact :- 0 84475 69893

Ordering Code: Name - Mimic Tower Lamp 5 Tier Model - MIMIC - MNPTI - 5T - S - RAGBW

Technical Specification

- Make: **MIMIC**
- Model name :- '**MIMIC**' Tower Lamp 5 tier with buzzer
- Rated Insulation voltage (Ui) :- 2000Volts
- Rated Operational Voltage (Ui) :- a) 12,24,48,110,230VDC
b) 12,24,48,110,230V,415VAC.
- Voltage Fluctuation Range :- 10% ±
- Rated Operational Current (Ie) :- 60mA for each indication max
- Insulation Resistance :-1000 mega ohm over
- Impulse Withstand Voltage :- +4500V
- Shock Resistance :- 490m/s²
- Durability :-Over 10000 cycles
- Degree Of Protection :- IP 54
- Operating Temperature :- - 20°C to +60°C
- Storage Temperature :- -30 to 75° c
- Relative Humidity :- 45 to 85 %
- Altitude :- Max 2000met
- Connection :- 4 Wire, 7/36 swg.
- Mounting Plate Thickness :- 1 To 6 mm
- Confirming to Standard :-IEC 60947-5-1
IEC 60947-1
- Connection details:- Ferrule no.2- tier 1top
Ferrul no.3-tier 2
Ferrul no.4 - tier 3
Ferrul no.5 - tier 4
Ferrul no.6 - tier 5
Ferrul no.9 - common

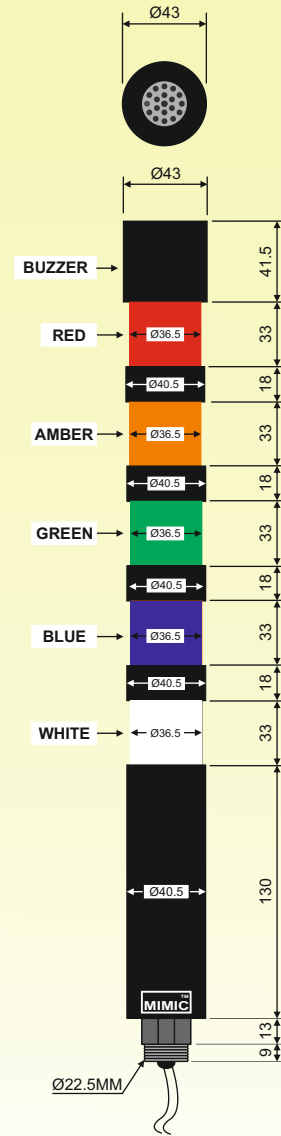

Ordering Requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

Ordering code

MIMIC - **Type** - **5 T** - **Type of function** - **Voltage** - **Type of voltage** - **Color Tier 'T'**

Panel Top details	code	Function details	Code	voltage	code	voltage	code
Nano Panel Top Indicator	NPTI	Steady	S	12 v - 12	AC	AC	
M Series Panel Top Indicator	MNPTI	Flashing	F	24 v - 24	DC	DC	
Standard Panel Top Indicator	PTI	Bicolour	BI	30 v - 30			
		Steady + Flashing	SF	48 v - 48			
		Steady + Buzzer	SBZ	110 v - 110			
		Flasher + Buzzer	FBZ	230 v - 230			
		Bus bar indicator	BS	415 v - 415			
		Steady + Flasher + Buzzer with audio accept	SFBZAA				

Color	T1	T2	T3	T4	T5
Red	R	R	R	R	R
Amber	A	A	A	A	A
Green	G	G	G	G	G
Blue	B	B	B	B	B
White	W	W	W	W	W

MIMIC

Example: Tower Lamp 5 Tier m series /230VAC/ Red-Amber-Green-Blue-White.

code : MIMIC - MNPTI - 5T - S - 230 - AC - RAGBW