


# FLAMEPROOF HOOTER WITH FLASHER

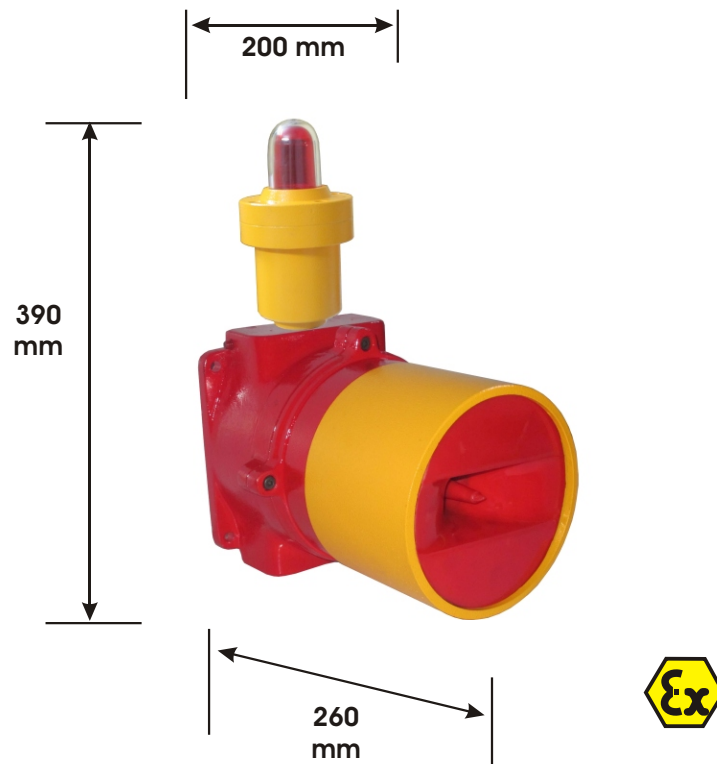

## Salient features :

**Aux. Supply :** 230 VAC, 110VAC OR 24VDC

**Power consumption :** 450 mA @ 24VDC & 85 mA @ 230VAC

**Operating Temp. :** Up to 55°C

**Humidity :** 90 % at 40°C

**Enclosure :** LM6, Aluminum

**Coating :** Powder coted

**Dimension :** As per drawing

**Application :** Hazardous area

**Gas group :** IIA, IIB, Zone 1 & Zone 2

**Weight :** 9 Kg MAX.

**Terminals :** Up to 2.5 sqmm.

**Cable entry:** Max. 6 Nos. 3/4" ET

**Mounting :** Wall mounting / slab mounting type

**Flasher :** LED or Xenon type.



**Flameproof Instrumentation**

E / 14 , Anand nagar MIDC, Ambemath ( E ), Dist: Thane, Maharashtra.  
Mai : fi.figroup@gmail.com      www.flameproof.co.in