

MIMIC 'M' Series Hooter/Buzzer/Ringer is compact size alarm product designed for electronic / electrical control panels.

M-Series Hooter is provided with hooter tone (Model - MH).

M-Series Buzzer is provided with high pitch beeping sound (Model - MB).

M-Series Ringer is provided with high pitch telephone ringer sound (Model - MR).

- 22.5 mm cutout
- 100 - 110 dB Sound output
- Range 50 meters.
- Available Voltages : 12/24/48/230 VAC, VDC, VAC/DC.



TECHNICAL

Rated Operational Voltage (AC,DC,AC/DC)	12, 24, 48, 110, 230
Operating Temperature	40 to 80°C
Storage Temperature	30 to 75°C
Connection	2.5 sq. mm wire x 2 nos.
Control	Direct ON
Protection Rating	IP 20
Compatible Copper Conductor	AWG 20 to 14
Mounting plate thickness	1 to 6 mm
Confirming to Standard	IEC 60947-5-1, IEC 60947-1

PERFORMANCE

Voltage Fluctuation Range	+ 15%
Insulation Resistance	1000m \bar{V} over
Impulse Withstand Voltage	+4500V,3Times For Each Pole(1.2/50 μ s).
Shock Resistance	490m/s ²
Durability	Over 10000 cycles

BODY


Main Body	ABS
Body Colour	Opal White
Connector Body	PBT fire retardant

Manufactured by : Steam Airetric Controls

Made in 

Steam Airetric Controls

Plot. No. A/34, Additional Ambernath MIDC, Anand Nagar, Ambernath (E), Dist. Thane Maharashtra, India – 421 506.

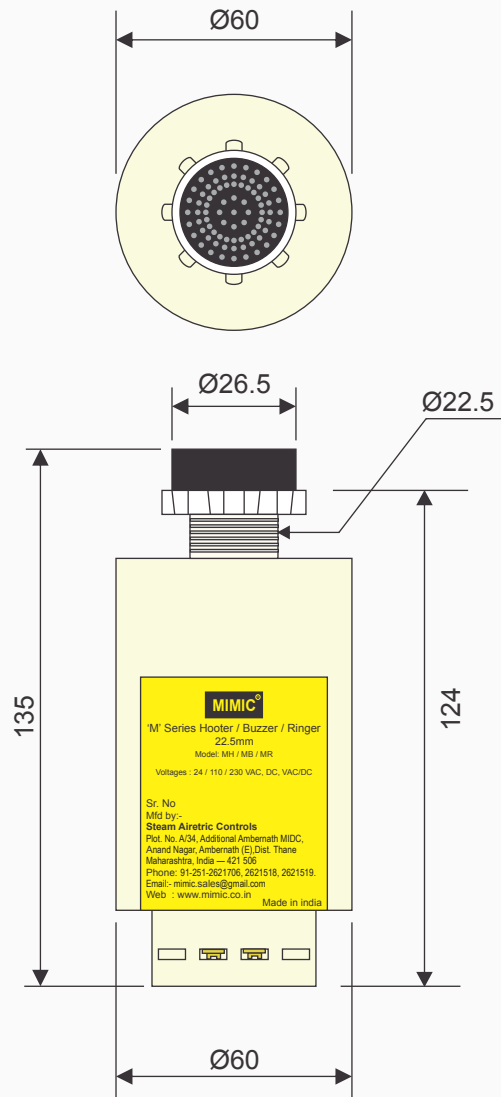

- All Dimensions are in mm
- Dimension for reference purpose.
- Dimension may change without notice, development is continuous process

Manufactured by : Steam Airetric Controls

Made in 

Steam Airetric Controls

Plot. No. A/34, Additional Ambarnath MIDC, Anand Nagar, Ambarnath (E), Dist. Thane
Maharashtra, India – 421 506.

MIMIC[®]