

MIMIC Window Flasher Module is designed to fit on a DIN Rail channel inside control panel. Output of the module is given to the Annunciation Window for flashing function.

Applications:- Electrical Control Panels, Automation panels fault indications safety & fire panels defense panels other.

- DIN rail mounting.
- Suitable for MIMIC LED Annunciation Window.
- 12 to 230 VAC, VDC, VAC/DC models available.
- Easy to adapt to Annunciation Window.



## TECHNICAL

Input Voltage (AC,DC,AC/DC).	12/24/48/110/230
Mounting	Din Rail
Operating Temp.	-20deg. to 60 deg. C
Storage Temp.	-30deg. to 75 deg. C
Protection Rating	IP 52
Relative Humidity	45 - 85%
Weight	60 gms

## PERFORMANCE

Rated Insulation Voltage (AC , DC)	250V
Voltage Fluctuation range	+15%
Rated Operational Current	40 mA
Insulation Resistance (M ohm)	1000
Durability	over 50000 cycles
Shock resistance	490 m / sq. sec
Compatible Copper Conductor	AWG 20 - 14, 2.5 sq.mm
Impulse Withstand Voltage	+4500V 3 Times for each pole
Flashing Frequency	2 sec. ON, 1 sec. OFF

## BODY

Main Body	PBT-Fire Retardent
Lens	Polycarbonate

Manufactured by : Steam Airetric Controls



Made in

## Steam Airetric Controls



Plot. No. A/34, Additional Ambarnath MIDC, Anand Nagar, Ambarnath (E),Dist. Thane Maharashtra, India – 421 506.

# Dimensional Details


W-FM



Flasher Module



Window

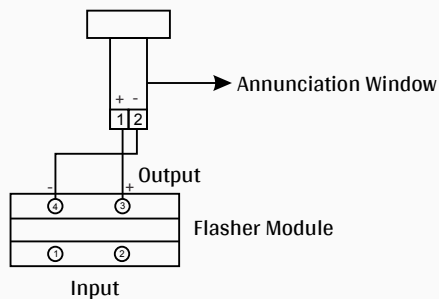

Connection Diagram

- All Dimensions are in mm
- Dimension for reference purpose.
- Dimension may change without notice, development is continuous process

Manufactured by : Steam Airetric Controls

Made in

## Steam Airetric Controls

Plot. No. A/34, Additional Ambarnath MIDC, Anand Nagar, Ambarnath (E), Dist. Thane Maharashtra, India – 421 506.

**MIMIC**<sup>®</sup>

9821252022

sales@mimicproducts.in

www.mimicproducts.in