

Electronic Hooter with Flasher

MIMIC Electronic Hooter with Flasher is designed for wall & foot mounting applications.

It is provided with features such as single tone , two tone, wobbling tone $\boldsymbol{\vartheta}$ audio cancellation facility with flashing indications.

- Hooter with Flasher
- 92 x 92 mm cutout
- 90 110 dB Sound output
- **Available Voltages**

DC:- 12, 24 VDC AC:- 110, 230 VAC



TECHNICAL

Rated Operational Voltage (DC)	12VDC, 24 VDC, 110VAC, 220VAC
Operating Temperature	20 to 60°C
Storage Temperature	30 to 75°C
Relative Humidity	45 to 85 %
Altitude	Max 2000m
Protection Rating	IP 52
Compatible Copper Conductor	AWG 20 to 14
Mounting plate thicknesss	1 to 6 mm
Confirming to Standard	IEC 60947-5-1, IEC 60947-1

PERFORMANCE

Rated Insulation voltage	250 V
Voltage Fluctuation Range	+ 15%
Rated Operational Current	583 mA max
Insulation Resistance	1000mŸ over
Impulse Withstand Voltage	+4500V,3Times For
	EachPole(1.2/50µs).
Shock Resistance	490m/s ²
Durability	Over 10000 cycles

BODY

Main Body	ABS
Lens	Polycarbonate

Manufactured by: Steam Airetric Controls

Made in 🕥



Steam Airetric Controls

Plot. No. A/34, Additional Ambernath MIDC, Anand Nagar, Ambernath (E),Dist. Thane Maharashtra, India — 421 506.












Model & Dimensional details

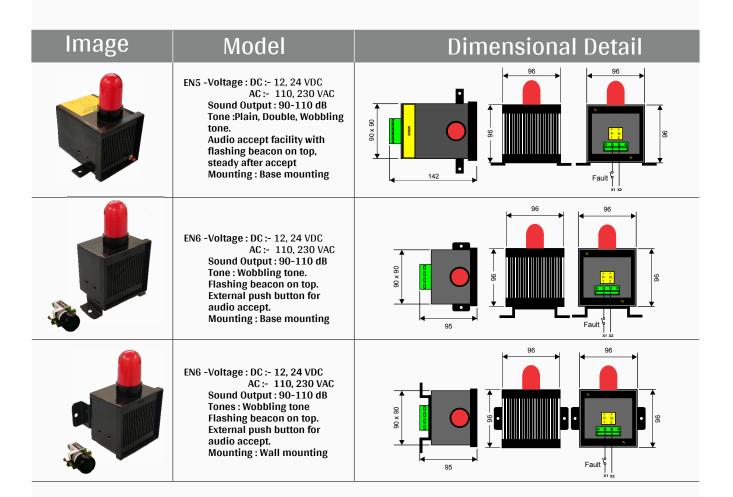

- All Dimensions are in mm
- Dimension for reference purpose.
- Dimension may change without notice, development is continuous process

Manufactured by: Steam Airetric Controls

Made in 🕥



Steam Airetric Controls

Plot. No. A/34, Additional Ambernath MIDC, Anand Nagar, Ambernath (E),Dist. Thane Maharashtra, India - 421 506.







