




### 70(50) Series



- ◆ AE 70/30 available in Accuracy Class 0.5 & Class 1
- ◆ AE 70/50 available in Accuracy Class 0.5 & Class 1
- ◆ For Bus bar size details please refer dimension and diagram.
- ◆ Orders for different ranges of CT's are accepted on request.
- ◆ 5A & 1A Secondary available.
- ◆ For all transformers DIN RAIL plate can be supplied (as per DIN EN 50022) on request.

### 70 (50)

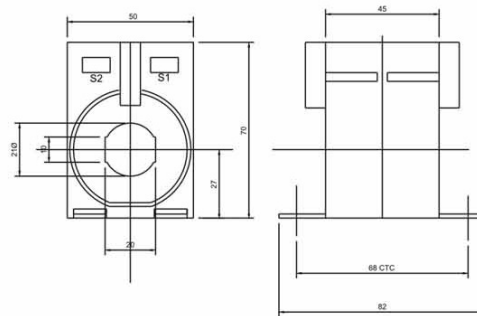

Rated Primary Current	70/14		70/21		70/30	
	Accuracy class		Accuracy class		Accuracy class	
	0.5	1	0.5	1	0.5	1
30A	-	-	-	-	-	-
40A	-	1.0VA	-	-	-	-
50A	-	1.5A	-	1VA	-	-
60A	-	1.5A	-	1VA	-	-
75A	-	1.5VA	-	1.5VA	-	1.0VA
80A	-	1.5VA	2.5VA	1.5VA	-	1.0VA
100A	2.5VA	3.75VA	2.5VA	2.5VA	1.0VA	2.5VA
120A	2.5VA	3.75VA	2.5VA	2.5VA	1.0VA	2.5VA
125A	2.5VA	3.75VA	2.5VA	3.75VA	1.0VA	2.5VA
150A	3.75VA	5.0VA	2.5VA	5.0VA	2.5VA	3.75VA
200A	3.75VA	5.0VA	3.75VA	5.0VA	2.5VA	3.75VA
250A	5.0VA	7.5VA	5.0VA	5.0VA	5.0VA	5.0VA
300A	7.5VA	7.5VA	5.0VA	7.5VA	5.0VA	5.0VA
400A	-	-	5.0VA	7.5VA	5.0VA	5.0VA
500A	-	-	-	-	5.0VA	5.0VA
600A	-	-	-	-	5.0VA	5.0VA

Rated Primary Current	70/14		70/21		70/30	
	Accuracy class		Accuracy class		Accuracy class	
	0.5	1	0.5	1	0.5	1
30A	-	1.0VA	-	-	-	-
40A	-	1.0VA	-	-	-	-
50A	1.5VA	1.5VA	1.5VA	1.5VA	1.0VA	1.0VA
60A	1.5VA	1.5VA	1.5VA	1.5VA	1.0VA	1.0VA
75A	2.5VA	3.75VA	2.5VA	2.5VA	2.5VA	2.5VA
80A	2.5VA	3.75VA	2.5VA	2.5VA	2.5VA	2.5VA
100A	3.75VA	5.0VA	2.5VA	5.0VA	2.5VA	5.0VA
120A	3.75VA	5.0VA	3.75VA	5.0VA	2.5VA	5.0VA
125A	3.75VA	5.0VA	3.75VA	5.0VA	2.5VA	5.0VA
150A	5.0VA	7.5VA	5.0VA	7.5VA	3.75VA	5.0VA
200A	7.5VA	10VA	7.5VA	10VA	5.0VA	7.5VA
250A	10VA	12.5VA	7.5VA	10VA	5.0VA	7.5VA
300A	10VA	12.5VA	7.5VA	12.5VA	5.0VA	10VA
400A	-	-	10VA	15VA	7.5VA	10VA
500A	-	-	10VA	-	7.5VA	10VA
600A	-	-	10VA	-	7.5VA	10VA

