



Features

- LED based
- 7 watts
- equivalent to 60 watt filament lamp
- 24VAC.operating voltage, safe for operator
- 230 VAC System input voltage
- System suitable for 2 hand lamps
- Borosilicate glass dome; replaceable after breakage
- Non-slippery rubber coated attractive handle.
- 20 meter cable provided

Introduction

Manufacturer and exporter of LED Hand lamps. Manufactured in India.
The rugged design insures the perfect working in worst site conditions .Led based technology insures the long life of hand lamp.

Applications

1. project sites
2. maintainance engineers
3. chemical vessel manufacturers
4. fabrication sites
5. Mechanical Engineering workshops
6. Air-conditioning ducting fabrication and maintainance

Other related models

1. Handlamp with rechargeable battery inbuilt

Head Office.

Plot. No. A/34, Additional Ambarnath MIDC, Anand Nagar, Ambarnath (E), Dist. Thane
Maharashtra, India — 421 506.



Sales Inquiry from outside INDIA : +91-9321252022, +91-251-2621706, 2621518, 2621519 Email:- mimic.ledlamps@gmail.com

Sales Inquiry from INDIA : 09321252022, 0251-2621706, 2621518, 2621519

Website:-www.mimicproducts.com

Technical Specification

- operating voltage of handlamp:-24 VAC
- Watt :- 7watt
- operating voltage of system:-230v AC
- Lux Level :- 80 at 1 met
- Weather Protection IP44
- current : 20 mA
- Connection:- cable 3x1.5sq.mm,20 met
- System :- transformer input 230 vac,50hz,+10%
out put 24 vac,50hz,+5%
200va
50 hz
Two output
winding -copper
Input/output terminal-suitable for 2.5 sq mm ring and pin,
provided with terminal plates
- Enclosure:- M.S.powder coated with handle
- 1 set compresses of system, cables and 2 nos of hand lamps
- Rated insulation voltage:- AC/DC 250 V
- Colors:- warm white or cool white
- Material :- backelitr body and borosilicate glass
- Insulation Resistance:-1000 M ohm
- Durability:- Over 10000 cycles
- Operating Temp.:-20 to 60 deg. C.
- Storage temperature :- -30 to 75 deg C
- Relative Humidity:- 45 to 85 %
- Altitude :- Max 2000 met.
- Weight :- 3.5kg of total system

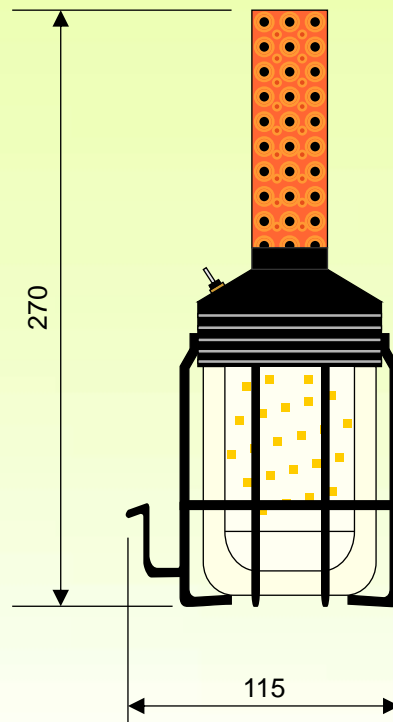

All dimensions in millimetres

Ordering

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

MIMIC-Hand lamp-2point-24VAC with transformer system